

# PADDING MACHINES SPD-150

CE Approved



## SPD-150 Padding Machine

SUPERIOR's entry level padding machine is the perfect solution for small padding jobs. Thanks to its compact design, the SPD-150 can be operated by remote control or from the seat located on the side of the machine.

### Features

- Reversible/folding conveyor belt
- Optional remote-controlled operation
- Side operator's seat for better view of the ditch
- Adjustable dowel
- CE compliant

### MAIN FEATURES

Screening area	32 sq ft / 3 sq m
Operating weight	35,273 lbs / 16,000 kg
Shipping dimensions	5.8 m (19 ft) L x 2.8 m (9.1 ft) W x 2.33 m (7.6 ft) H

# PADDING MACHINES SPD-150

## SPECIFICATIONS



### ENGINE

Type	CATERPILLAR
Model	C4.4 ACERT
Net flywheel power (DIN 6270)	140 HP - 103 kW
Governed speed	2,200 g/pm



### HYDRAULIC SYSTEM

Main pumps: (Mannesmann)	
- 2 independent variable pumps travel	
Maximum capacity	32 lt/min - 8.4 U.S. gal/min
Maximum operating pressure	400 bar - 5800 p.s.i.
Service pumps	1 tandem gear type
Maximum capacity	160 lt/min - 42.3 U.S. gal/min



### TRANSMISSION

Type	Hydrostatic
Motors	(HYDROMATIC) two motors with axial pistons disappearing into the track frames
Brakes	Integrated negative control
Final drives	Epicycloidal oil soaked
Maximum speed	3.4 km/h - 2.2 miles/hr



### CONTROLS

Type	Electronic remote control
Safety	Emergency shut-off



### ESCALATOR

Type	Hydrostatic, operator controlled, variable speed
Vertical adjustment	Minus 8 inches to plus 2 ft
Chain Adjusters	Mechanical
Reversible screen mesh chain	



### SCREEN

Interchangeable screen mesh	1/4" to 1-1/2"
Width	1,035 mm - 41 in
Maximum feed size	400 mm - 15.7 in



### CONVEYOR BELT

Bilateral hydraulic extension slide	
Type	Rubber
Width	460 mm - 18 in
Length	3,660 mm - 12 ft
Variable speed	0 - 420 mt/min
Rotation capability	Reversible
Transmission	Hydraulic variable speed
Hydraulic motors	2 orbital type



### ELECTRIC SYSTEM

Operating voltage	24 V
Maintenance free supplied batteries	2
Capacity (total)	100 Ah
Starter capacity	4 Kw
Alternator	30 A



### FLUID CAPACITIES

Fuel tank	315 liters - 83 U.S. gal
Hydraulic system circuit	290 liters - 77 U.S. gal




### PRODUCTION

Production rate will vary with certain conditions:	
Soil Condition, Pipe Size, Terrain, R.O.W.	
Indicative production, 10" pipe, normal soil 158 mt/h - 520 ft/hr	

## DIMENSIONS

## OPERATING WEIGHT 16,000 kg - 32,273 lb

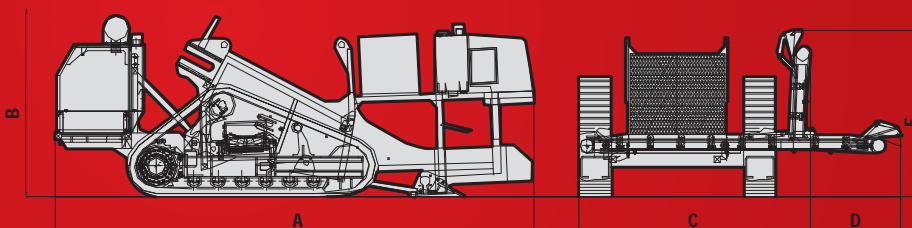

A	5.8 m / 19'
B	2.33 m / 7.6'
C	2.8 m / 9.2'
D	1.1 m / 3.6'
E	2.05 m / 6.7'

# CONTACT INFORMATION & DISCLAIMER

## Main office – General inquiries SUPERIOR Manufacturing

16031 East Freeway  
Channelview, TX 77530  
U.S.A.  
Phone 281.457.4400  
Fax 281.452.5455  
U.S. Toll Free 800.383.2666  
Intl. Toll Free 800.9675.3948  
pipeline@wwmach.com  
www.worldwidemachinery.com

## Italy office SUPERIOR Manufacturing

Via Roma, 18  
San Pancrazio, Parma  
Italy

## Evan Greenberg

Vice-President of Intl. Operations

## Worldwide offices Europe and Australia

Juergen Hafemann  
Phone +49.0.231.963.3073 Germany  
Phone +61.0.400.144.432 Australia  
pipelinece@wwmach.com

## India

Abhishek Bhotika  
Phone +91.11.414.59230  
pipelineind@wwmach.com

## Africa

Evan Greenberg  
Phone +1.281.452.5800  
pipeline@wwmach.com

## Russia, China and the Middle East

Sergio Braoude  
Phone +39.349.198.1281 Italy  
Phone +7.495.507.4827 Russia  
fsupipeline@wwmach.com

## Latin America

Salvador Villasana  
Phone +52.81.8.394.0160  
pipelinesa@wwmach.com

## North America

Rick Layh  
Phone +1.281.457.4400  
pipelinena@wwmach.com



## DISCLAIMER

The information contained in this brochure is intended to be of a general nature only. The SUPERIOR Manufacturing Company may at any time and from time to time, for technical or other necessary reasons, modify any of the details or specifications of the product described in this brochure. Illustrations do not necessarily show products in standard conditions. The dimensions, weights and capacities shown herein, as well as any conversion data used, are approximate only and are subject to variations within normal manufacturing techniques.