



Titan Extreme Duty (TXD) Configuration Guide






2.5 ton Standard Cargo
TXD 1078

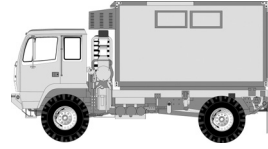


2.5 ton Van
TXD 1079




2.5 ton Chassis
TXD 1080


Model No.	TXD 1078		TXD 1079		TXD 1080		
Curb Weight (lb/kg)	17,214 lb	7,808 kg	19,601 lb	8,891 kg	14,332 lb	6,501 kg	
Length (in/mm)	257.2 in	6,534 mm	261.4 in	6,639 mm	251.7 in	6,394 mm	
Width (in/mm)	96 in	2,438 mm	96 in	2,438 mm	96 in	2,438 mm	
Height	Oper. (in/mm)	112 in	2,845 mm	138.9 in	3,529 mm	112 in	2,845 mm
	Air Trans. (in/mm)	105.5 in	2,680 mm	105.5 in ⁴	2,680 mm ⁴	105.5 in	2,680 mm
Wheel Base (in/mm)	153.5 in	3,900 mm	153.5 in	3,900 mm	153.5 in	3,900 mm	
Range (Min. Gr. Wt.) (mi/km)	400+ mi	645+ km	400+ mi	645+ km	400+ mi	645+ km	
Approach Angle/Departure Angle	40°	37°	40°	37°	40°	40°	
Payload (lb/kg) plus kits	5,000 lb	2,268 kg	5,000 lb	2,268 kg	See Note 2	See Note 2	
Towed Load (lb/kg)	12,000 lb	5,443 kg	12,000 lb	5,443 kg	12,000 lb	5,443 kg	
Inside Cargo	Length (in/mm)	149 in	3,784 mm	N/A	N/A	N/A	N/A
Bed	Width (in/mm)	91 in	2,311 mm	N/A	N/A	N/A	N/A

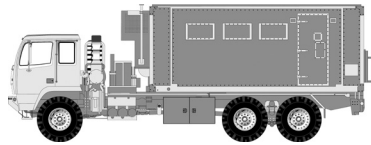

5.0 ton Expansible Van
TXD 1087




5.0 ton Tractor
TXD 1088




5.0 ton Wrecker
TXD 1089


Model No.	TXD 1087		TXD 1088		TXD 1089		
Curb Weight (lb/kg)	30,624 lb	13,891 kg	19,654 lb	8,915 kg	35,172 lb	15,954 kg	
Length (in/mm)	391 in	9,937 mm	270 in	6,859 mm	366 in	9,304 mm	
Width (in/mm)	96 in	2,438 mm	96 in	2,438 mm	96 in	2,438 mm	
Height	Oper. (in/mm)	147 in	3,730 mm	112 in	2,845 mm	112 in	2,845 mm
	Air Trans. (in/mm)	105.5 in ⁴	2,680 mm ⁴	105.5 in	2,680 mm	105.5 in	2,680 mm
Wheel Base (in/mm)	216.5 in	5,500 mm	161 in	4,100 mm	209 in	5,300 mm	
Range (Min. Gr. Wt.) (mi/km)	300+ mi	483+ km	300+ mi	483+ km	300+ mi	483+ km	
Approach Angle/Departure Angle	40°	17°	40°	70°	40°	40°	
Payload (lb/kg) plus kits	5,000 lb	2,268 kg	25,000 lb	11,340 kg	11,000 lb ³	4,990 kg ³	
Towed Load (lb/kg)	21,000 lb	9,526 kg	See Note 1	See Note 1	36,000 lb	16,330 kg	
Inside Cargo	Length (in/mm)	N/A	N/A	N/A	N/A	N/A	
Bed	Width (in/mm)	N/A	N/A	N/A	N/A	N/A	



2.5 ton Trailer
TXD 1082




5.0 ton Trailer
TXD 1095




Load Handling System Trailer
TXD 1147

Model No.	TXD 1082		TXD 1095		TXD 1147		
Curb Weight (lb/kg)	7,306 lb	3,314 kg	10,128 lb	4,594 kg	9,480 lb	4,300 kg	
Length (in/mm)	209.5 in	5,321 mm	230.5 in	5,855 mm	338 in	8,575 mm	
Width (in/mm)	96 in	2,438 mm	96 in	2,438 mm	96 in	2,438 mm	
Height	Oper. (in/mm)	78 in	1,979 mm	82.2 in	2,087 mm	58.5 in	1,486 mm
	Air Trans. (in/mm)	78 in	1,979 mm	82.5 in	2,087 mm	58.5 in	1,486 mm
Wheel Base (in/mm)	N/A	N/A	N/A	N/A	183.5 in	4,661 mm	
Range (Min. Gr. Wt.) (mi/km)	N/A	N/A	N/A	N/A	N/A	N/A	
Approach Angle/Departure Angle	N/A	25°	N/A	47°	N/A	30°	
Payload (lb/kg) plus kits	5,000 lb	2,268 kg	10,000 lb	4,536 kg	18,000 lb	8,165 kg	
Towed Load (lb/kg)	N/A	N/A	N/A	N/A	N/A	N/A	
Inside Cargo	Length (in/mm)	149 in	3,785 mm	170.2 in	4,324 mm	N/A	N/A
Bed	Width (in/mm)	91.5 in	2,324 mm	91.5 in	2,324 mm	N/A	N/A

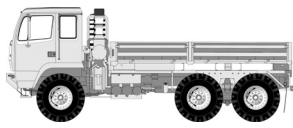


5.0 ton Standard Cargo
TXD 1083

20,796 lb	9,433 kg
283.7 in	7,206 mm
96 in	2,438 mm
112 in	2,845 mm
105.5 in	2,680 mm
161.4 in	4,100 mm
300+ mi	483+ km
40°	49°
10,000 lb	4,536 kg
21,000 lb	9,526 kg
170 in	4,318 mm
91 in	2,311 mm

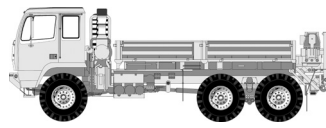


5.0 ton Standard Cargo with MHE
TXD 1084

24,656 lb	11,184 kg
312 in	7,933 mm
96 in	2,438 mm
112 in	2,845 mm
105.5 in	2,680 mm
161 in	4,100 mm
300+ mi	483+ km
40°	27°
10,000 lb	4,536 kg
21,000 lb	9,526 kg
170 in	4,318 mm
91 in	2,311 mm

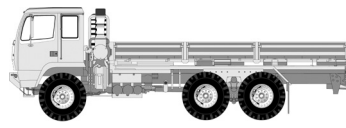


5.0 ton Standard Long Cargo
TXD 1085

21,706 lb	9,846 kg
348.9 in	8,863 mm
96 in	2,438 mm
112 in	2,845 mm
105.5 in	2,680 mm
177 in	4,500 mm
300+ mi	483+ km
40°	18°
10,000 lb	4,536 kg
21,000 lb	9,526 kg
244 in	6,204 mm
91 in	2,311 mm

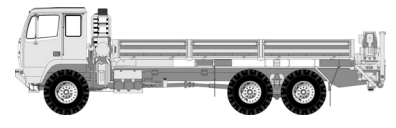


5.0 ton Long Cargo with MHE
TXD 1086

26,151 lb	11,862 kg
381 in	9,683 mm
96 in	2,438 mm
112 in	2,845 mm
105.5 in	2,680 mm
216.5 in	5,500 mm
300+ mi	483+ km
40°	21°
10,000 lb	4,536 kg
21,000 lb	9,526 kg
244 in	6,204 mm
91 in	2,311 mm




5.0 ton Chassis
TXD 1092

17,676 lb	8,018 kg
272.8 in	6,928 mm
96 in	2,438 mm
112 in	2,845 mm
105.5 in	2,680 mm
161.4 in	4,100 mm
300+ mi	483+ km
40°	60°
See Note 2	See Note 2
21,000 lb	9,526 kg
N/A	N/A
N/A	N/A

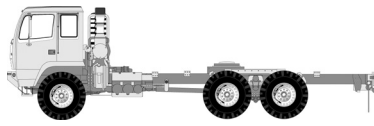


5.0 ton Long Chassis
TXD 1096

17,820 lb	8,083 kg
348.9 in	8,861 mm
96 in	2,438 mm
112 in	2,845 mm
105.5 in	2,680 mm
177.2 in	4,500 mm
300+ mi	483+ km
40°	18°
See Note 2	See Note 2
21,000 lb	9,526 kg
N/A	N/A
N/A	N/A

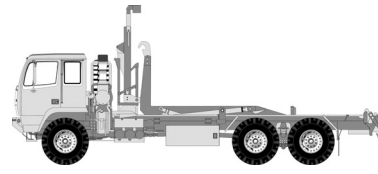

9.0 ton Load Handling System
TXD 1148

25,049 lb	11,362 kg
362 in	9,187 mm
96 in	2,438 mm
112 in	2,845 mm
105.5 in	2,680 mm
209 in	5,300 mm
300+ mi	483+ km
40°	23°
17,640 lb	8,000 kg
27,117 lb	12,300 kg
N/A	N/A
N/A	N/A



10.0 ton Dump
TXD 1157

26,320 lb	11,939 kg
292.5 in	7,430 mm
96 in	2,438 mm
112 in	2,845 mm
105.5 in	2,680 mm
161.4 in	4,100 mm
300+ mi	483+ km
40°	36°
20,000 lb	9,072 kg
26,000 lb	11,794 kg
N/A	N/A
N/A	N/A

FOR MORE INFORMATION CONTACT:

Titan Trucks
16031 East Freeway
Houston, TX 77530
Telephone +1-281-457-4400
U.S. Toll Free +1-800-383-2666
Intl. Toll Free 800-9675-3948
Email titan@wwmach.com
www.worldwidemachinery.com

This document gives only a general description of the product(s) or services and except where expressly provided otherwise shall not form part of any contract. From time to time, changes may be made in the products or the conditions of supply. Titan Trucks reserves the right to change product specifications without prior notice.

© 2011 Titan Trucks All rights reserved.

Notes

1. Towed load - 60,710 lb (27,538 kg) Fifth Wheel Vertical load (Payload) - 25,000 (11,340 kg)
2. Payload - consult factory
3. Payload (Lift & Tow Stinger) - 11,000 lb (4,990 kg)
4. With van body removed